

TUMBLE DRYERS

**DX**  
RANGE

**DX 55**

55KG  
121LB

**DX 77**

77KG  
169LB

**DX 90**

90KG  
198LB



**FEATURES**

- Full OPL microprocessor
- Gas, Steam heating, Electrical heating (DX55)
- Large door opening for easy loading and unloading (Ø 68cm)
- Galvanized drum
- Radial airflow
- Standard reversing drum
- Self-cleaning lint screen
- Preheating of intake air

**OPTIONS**

- Stainless steel drum
- Stainless steel front panel with black painted door
- Residual moisture control Sensodry+®:
  - lower energy and utility costs
  - lower linen replacement costs
- SafeTech™ Fire Suppression System



FAST DRYING



LOW ENERGY CONSUMPTION




LARGE DOOR OPENING

senso.dry+

SafeTech™

TYPE		DX55 EL	DX55 GAS	DX55 STEAM (HIGH PRESSURE)	DX77 GAS	DX77 STEAM (HIGH PRESSURE)	DX90 GAS	DX90 STEAM (HIGH PRESSURE)
CAPACITY	kg	55			77		90	
DIMENSIONS DRUM								
Drum volume	l	1021			1408		1656	
Drum diameter	mm	Ø 1118			Ø 1289		Ø 1289	
AIR FLOW	l/s	755			1156		1156	
HEATING	kW	60	79	119	116	190	125	190
MOTOR								
Drum	kW	0.560			0.560		0.560	
Fan	kW	0.746			2.238		2.238	
CONNECTION								
Electrical	AC/Hz	3×200-240V 50/60Hz, 3×380-415V 50 Hz, 3×380-415/440V 60Hz						
Gas inlet	inch	-	1	-	1	-	1	-
Steam inlet	inch	-	-	3/4	-	3/4	-	3/4
Air outlet	mm	254			305		305	
	inch	10			12		12	
DIMENSIONS								
Size H×W×D	mm	2177×1178×1725			2388×1349×1749		2388×1349×1939	
Net weight	kg	578	578	624	714	760	790	820
TRANSPORT DATA								
Packed H×W×D	mm	2286×1232×1829			2519×1473×1892		2515×1413×2019	
Gross weight	kg	607	607	656	756	806	855	855

The data concerning dimensions of machines include all extended parts

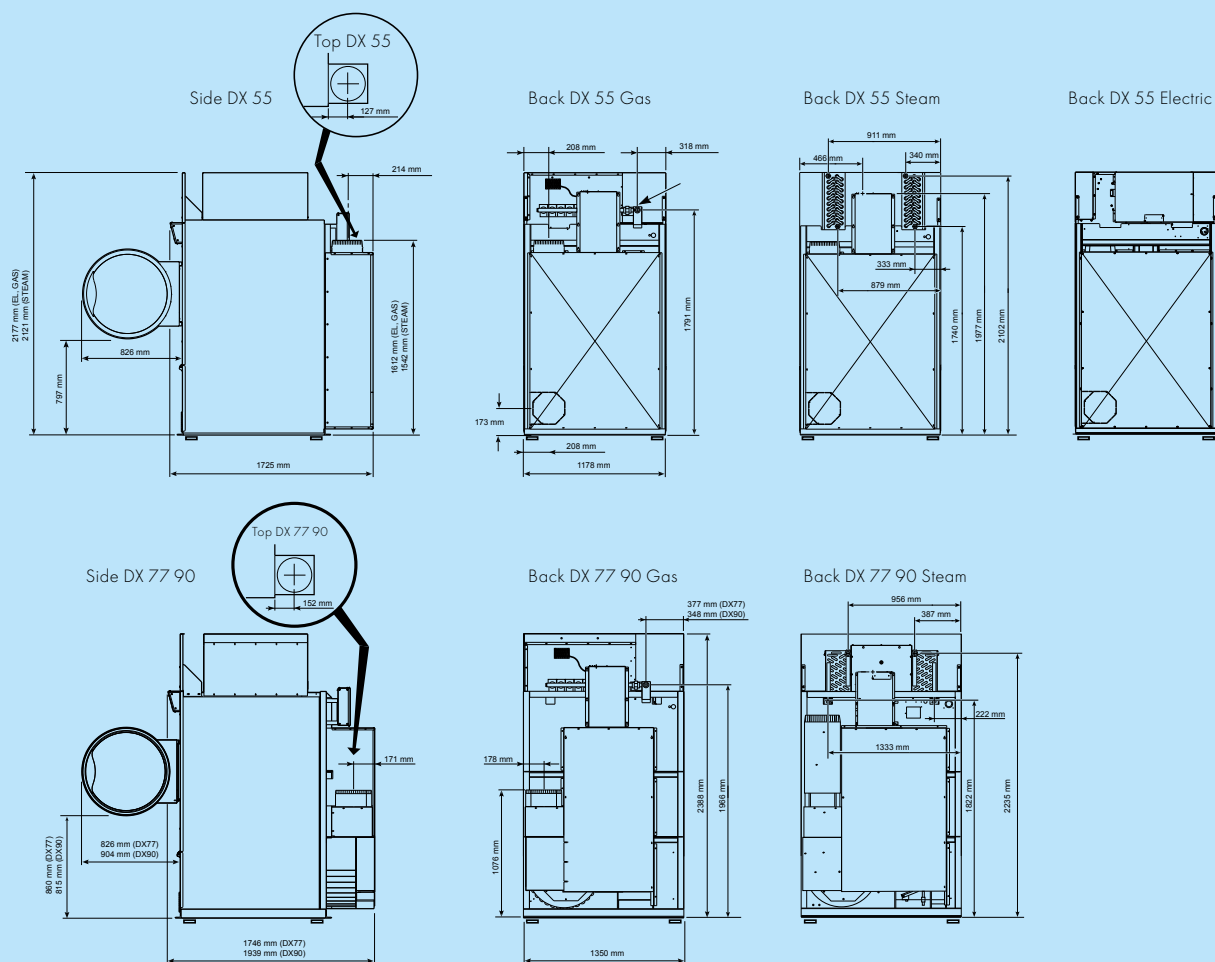

The company preserves the right to change the machines and the specification in this leaflet at any time, without prior notice. Details and photographs are only for information and never binding.

[www.primuslaundry.com](http://www.primuslaundry.com)

Primus by Alliance Laundry Systems



12-2017